


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=35mm
- ◆ 800 万像素高分辨率
- ◆ 宽带增透膜，提高透光性能
- ◆ 低畸变，相对照度高
- ◆ 全玻设计，高低温稳定性强
- ◆ 兼容可见光和红外波段适用

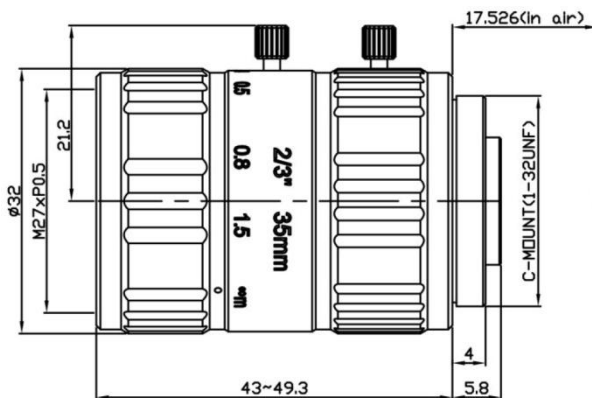

产品规格书：

| 800 万像素 35mm 工业镜头 C Mount | | 物距 Working Distance | 倍率 Magnification | 视野 2/3"Field of View(mm) | | |
|---------------------------------|-------------------------|------------------------|---------------------|--------------------------|-------|-------|
| 型号 Model | VM3528MP8 | mm | X | 横边 H | 纵边 V | |
| 像机尺寸 Image Size | 2/3-inch | 2000 | 0.018X | 496.7 | 372.5 | |
| 焦距 Focal length | 35mm | 1000 | 0.035X | 251.4 | 188.6 | |
| 光圈范围 F No. | F2.8-16 | 900 | 0.039X | 226.3 | 169.7 | |
| 最短物距 M.O.D(m) | 0.15-Inf. | 850 | 0.041X | 213.7 | 160.3 | |
| 控制方式 Operation | Iris | Manual 手动调整 | 800 | 0.044X | 201.1 | 150.9 |
| | Focus | Manual 手动调整 | 750 | 0.047X | 188.6 | 141.4 |
| 视场角 Angle of View (D×H×V) | 2/3" | 14.3°×10.8° | 700 | 0.050X | 176.0 | 132.0 |
| | 1/1.7" | 12.3°×9.2° | 650 | 0.054X | 163.4 | 122.6 |
| | 1/1.8" | 11.6°×8.7° | 600 | 0.058X | 150.9 | 113.1 |
| | 1/2" | 10.4°×7.8° | 550 | 0.064X | 138.3 | 103.7 |
| 畸变 TV Distortion | -0.06% | 500 | 0.070X | 125.7 | 94.3 | |
| 法兰距 Flange FL | 17.526mm | 450 | 0.078X | 113.1 | 84.9 | |
| 接口 Mount | C-Mount | 400 | 0.088X | 100.6 | 75.4 | |
| 近摄视野 2/3"FOV | 50.3mm×37.7mm(WD=200mm) | 350 | 0.100X | 88.0 | 66.0 | |
| 外形尺寸 Dimension | Φ32×43mm | 300 | 0.117X | 75.4 | 56.6 | |
| 重量 Weight | 70.5g | 280 | 0.125X | 70.4 | 52.8 | |
| 分辨率 Resolution | 8.0MP | 250 | 0.140X | 62.9 | 47.1 | |
| 滤镜尺寸 Filter | M27 P=0.5mm | 200 | 0.175X | 50.3 | 37.7 | |
| 工作温度 Working Temperature | -20°C ~ +60°C | 150 | 0.233X | 37.7 | 28.3 | |