


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：4/3" C 型 f=16mm F2.8
- ◆ 多层镀膜，有效提高透过率
- ◆ 2000 万像素高品质影像
- ◆ 高对比度、大景深设计
- ◆ 畸变小于 0.3%
- ◆ 适用机器视觉, 工业监控等



产品规格书：

2000 万像素 16mm 低畸变 FA 镜头 C Mount		物距 Working Distance	倍率 Optical Magnification	视野 4/3"Field of View(mm)	
型号 Model	KM1628MP20	mm	X	H	V
相机靶面 Image Size	4/3-inch	5000	0.032X	5583.6	4185.4
焦距 Focal length	16mm	2000	0.0079X	2238.7	1677.9
光圈范围 F No.	F2.8-22	1000	0.0158X	1124.1	842.3
最短物距 M.O.D(m)	0.1-Inf.	900	0.0176X	1012.7	758.9
控制方式 Operation	Iris	Manual 手动调整	800	0.0197X	901.7
	Focus	Manual 手动调整	700	0.0225X	790.0
视场角 Angle of View (D×H×V)	4/3"	69°×57.6°×44.8°	600	0.0262X	678.5
	1"	53.1°×43.6°×33.4°	550	0.0286X	622.7
	2/3"	37.9°×30.8°×23.3°	500	0.0314X	566.9
畸变 Distortion	<0.3%	450	0.0348X	511.2	383.0
光学后焦 BFL	22.4mm	400	0.0391X	455.5	341.2
接口 Mount	C-Mount	350	0.0445X	399.7	299.3
近摄视野 Object Dimension	343.8mm×257.5mm(WD=300 mm)	300	0.0518X	343.8	257.5
外形尺寸 Dimension	Φ38×78.3mm	250	0.0618X	288.1	215.7
重量 Weight	183.3g	200	0.0767X	232.2	173.8
滤镜尺寸 Filter Thread	M35.5x 0.5	150	0.101X	176.4	132.0
工作温度 Working Temperature	-20°C ~ +60°C	100	0.148X	120.5	90.1

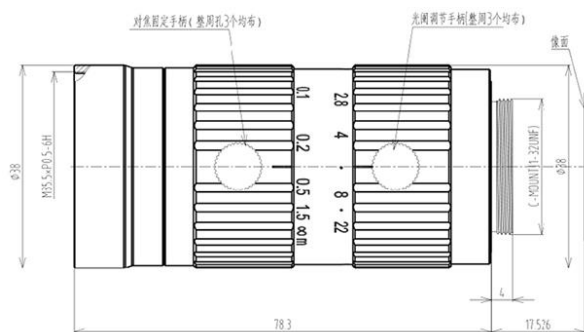