


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：4/3" C 型 f=35mm F2.8
- ◆ 多层镀膜，有效提高透过率
- ◆ 2000 万像素高品质影像
- ◆ 高对比度、大景深设计
- ◆ 畸变小于 0.1%
- ◆ 适用机器视觉, 工业监控等



### 产品规格书：

| 2000 万像素 35mm 低畸变 FA 镜头 C Mount |                            | 物距<br>Working Distance | 倍率<br>Optical Magnification | 视野 4/3"Field of View(mm) |        |
|---------------------------------|----------------------------|------------------------|-----------------------------|--------------------------|--------|
| 型号 Model                        | KM3528MP20                 | mm                     | X                           | H                        | V      |
| 相机靶面 Image Size                 | 4/3-inch                   | 5000                   | 0.0069X                     | 2532.7                   | 1903.1 |
| 焦距 Focal length                 | 35mm                       | 2000                   | 0.0174X                     | 1010.5                   | 759.1  |
| 光圈范围 F No.                      | F2.8-22                    | 1000                   | 0.0349X                     | 627.8                    | 378.0  |
| 最短物距 M.O.D(m)                   | 0.2-Inf.                   | 900                    | 0.0388X                     | 452.6                    | 339.9  |
| 控制方式<br>Operation               | Iris                       | Manual 手动调整            | 800                         | 0.0437X                  | 401.9  |
|                                 | Focus                      | Manual 手动调整            | 700                         | 0.0500X                  | 351.2  |
| 视场角<br>Angle of View (D×H×V)    | 4/3"                       | 34.9°×27.9°×20.9°      | 600                         | 0.0585X                  | 300.6  |
|                                 | 1"                         | 25.8°×20.6°×15.5°      | 550                         | 0.0639X                  | 275.3  |
|                                 | 2/3"                       | 17.8°×14.3°×10.7°      | 500                         | 0.0703X                  | 250.0  |
| 畸变 Distortion                   | <0.01%                     | 450                    | 0.0783X                     | 224.7                    | 168.7  |
| 光学后焦 BFL                        | 22.9mm                     | 400                    | 0.0882X                     | 217.8                    | 163.4  |
| 接口 Mount                        | C-Mount                    | 350                    | 0.1010X                     | 199.5                    | 149.7  |
| 近摄视野 Object Dimension           | 149.2mm×111.9mm(WD=300 mm) | 300                    | 0.1181X                     | 149.2                    | 111.9  |
| 外形尺寸 Dimension                  | Φ38×47.6mm                 | 250                    | 0.1421X                     | 124.1                    | 93.0   |
| 重量 Weight                       | 111.0g                     | 200                    | 0.1805X                     | 97.7                     | 73.2   |
| 滤镜尺寸 Filter Thread              | M35.5x 0.5                 | -                      | -                           | -                        | -      |
| 工作温度 Working Temperature        | -20°C ~ +60°C              | -                      | -                           | -                        | -      |

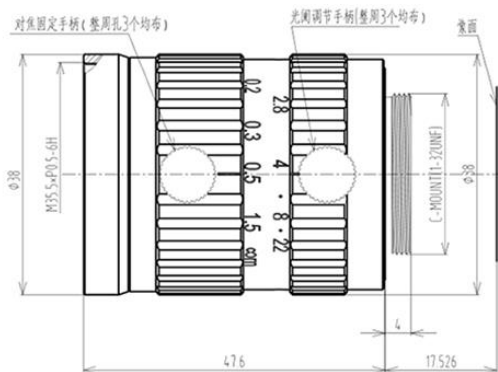