


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=16mm F2.8
- ◆ 800 万像素高分辨率
- ◆ 宽带增透膜，提高透光性能
- ◆ 低畸变，相对照度高
- ◆ 全玻设计，高低温稳定性强
- ◆ 适用于机器视觉，读码识别



产品规格书：

800 万像素 16mm FA 低畸变镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 2/3" Field of View(8.45*7.07mm)	
型号 Model	LM1628MP8	mm	X	H	V
像机尺寸 Image Size	Φ11mm(2/3")	∞	-	-	-
焦距 Focal length	16mm	1000	0.0159X	531.721	444.986
光圈范围 F No.	F2.8-16	900	0.0177X	478.921	400.797
最短物距 M.O.D(m)	0.1-Inf.	800	0.0199X	426.122	356.607
控制方式 Operation	Iris	Manual 手动调整	700	0.0227X	373.322
	Focus	Manual 手动调整	650	0.0244X	346.922
视场角(D*H*V) Angle of View	2/3"	37.2°×30.32°×23.00°	600	0.0264X	320.522
畸变 Distortion	<0.3%	550	0.0288X	294.122	246.133
光学后焦 BFL	10.0mm	500	0.0316X	267.722	224.038
法兰后焦 Flange BFL	17.526mm	450	0.0351X	241.322	201.943
接口 Mount	C-Mount	400	0.0394X	214.922	179.848
最大主光线夹角 CRA	11.2°	350	0.0449X	188.522	157.753
外形尺寸 Dimension	Φ33×32.5mm	300	0.0522X	162.121	135.658
重量 Weight	59.5g	250	0.0624X	135.721	113.564
分辨率 Resolution	8MP	200	0.0774X	109.320	91.470
滤镜尺寸 Filter Thread	M30.5x 0.5	150	0.1021X	82.919	69.376
工作温度 Working Temperature	-20°C ~ +60°C	100	0.1498	56.517	47.282

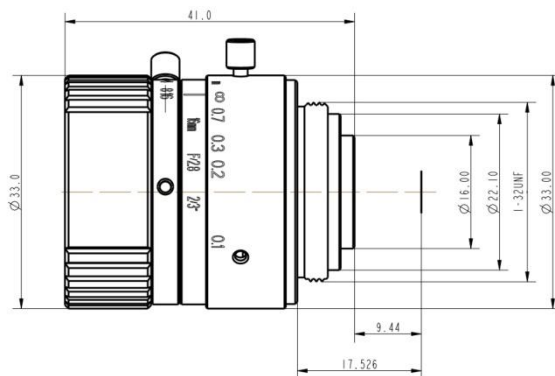